


ULYSSES

Linear spindle actuator - Force in push action 650 N - Stroke 180 and 300 mm



- Minimum size: external diameter 34 mm.
Suitable to be put in the profile of the window.
- Load transmission by rigid spindle.
- Particularly suitable to operate sun blades.
- High protection from atmospheric agents (IP 65).
- Supplied with fixing bracket and connector. Front or back fixing possibility.
- Back bracket to be ordered separately part No. 35697P
- A kit to reduce the stroke is available part No. 40735V

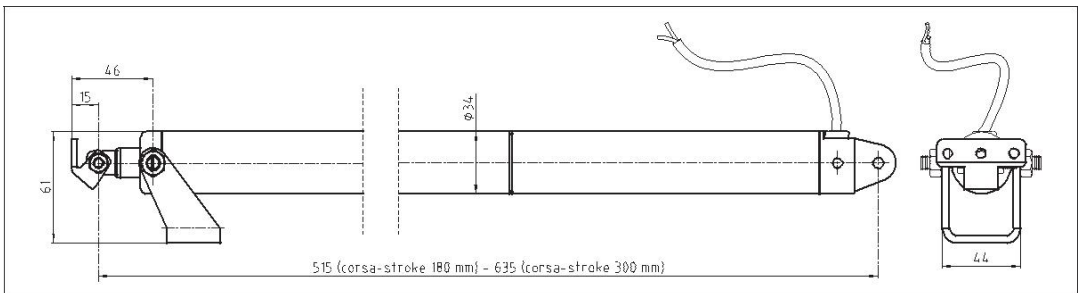

Actuators dimensions

VOLTAGE SUPPLY	24 Vdc \pm 10%
ELECTRIC CONNECTION	2 wires
OPERATION	by polarity inversion
STROKE	180/300 mm
FORCE (in push and pull action)	650 N
SPEED	6 mm/s
CURRENT ABSORPTION (with max load)	~ 1 A
PARALLEL CONNECTION	YES
LIMIT STOP	Electronic
PROTECTION CLASS	IP 65

PART No.
SILVER ANODIZED

STROKE 180 mm
40759Z

STROKE 300 mm
40760A

