

Fenestration Solutions Australia are excited to introduce the AXA Remote 2.0 by FENTEC™ to the Australian market.



The AXA Remote 2.0 by FENTEC™ is like no other window opener and is the perfect solution for those hard to reach windows. It not only provides you with the ability to open them remotely, it is easily retrofitted and is battery operated allowing simple and cost effective installation.

It is important for people to have fresh and healthy air in their homes and the AXA Remote 2.0 provides a minimum ventilation capacity of 25 m<sup>3</sup>/hour per area, based on a window surface area of 0.26 m<sup>2</sup>. Due to its many opening possibilities, the AXA Remote 2.0 is also able to sufficiently ventilate an area of 22.5 m<sup>2</sup>.

It's like no other window opener you've seen before!

## KEY FEATURES

- Simple and easy installation
- Easily retrofitted to existing windows
- Easy to combine with flyscreens
- Battery operated, no wiring required
- One remote can operate unlimited units
- Fully designed and manufactured in Europe

## HIGH CLOSING STRENGTH

Thanks to an advanced closing system, where chain-tightening smoothly triggers the wedge lock, the window is closed with a tractive force of 400 N.

## SELF-SUPPORTING

The AXA Remote 2.0 fully caters for its own power supply. Thus problematic and unattractive wiring is no longer necessary. The unit uses 4 AA penlight batteries and the remote control uses 2 AAA batteries.

## SAFE LIVING

The AXA Remote 2.0 by FENTEC™ is a very safe product. It uses more than 4 billion different codes and it is impossible for someone else to open your windows with another remote control.

## PROGRAMMABLE

If your home has numerous windows, various units can be programmed to allow operation with a single remote control. An unlimited number of units can be programmed in this manner. Conversely, one closing unit can be operated by maximum 8 different remote controls.






The AXA Remote 2.0 features an anti-trap system that interrupts the closing movement. If there is a risk of something becoming trapped between the window and the framework, the AXA Remote 2.0 will open.



## TECHNICAL SPECIFICATIONS

Implementation:	top-hung, casement and hopper windows
Window dimensions:	minimum 30 x 38 cm (h x w) maximum 100 x 100 cm (h x w), with 1x AXA Remote 2.0
Casing:	white or grey
Chain:	galvanised steel, single links
Maximum opening:	130 mm
Tractive/closing force:	400 N
Thrusting force:	150 N
Type control signal:	infra-red
Range remote control:	at least 6 m (depending on environmental factors, like dust and presence of light sources) and maximum 20 m
Coding permutations:	4 billion
Power supply unit:	4 AA batteries
Power supply remote control:	2 AAA batteries
Movement cycles per set batteries:	close and open at least 500 times
Sensors:	low-battery indicator (the window ends in closed position)
Screws:	4.0 x 40 mm (9x)

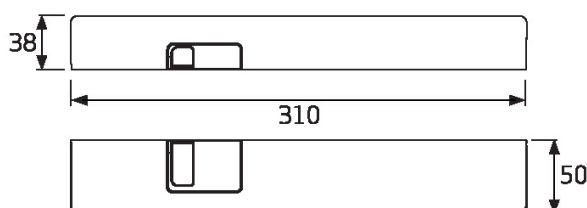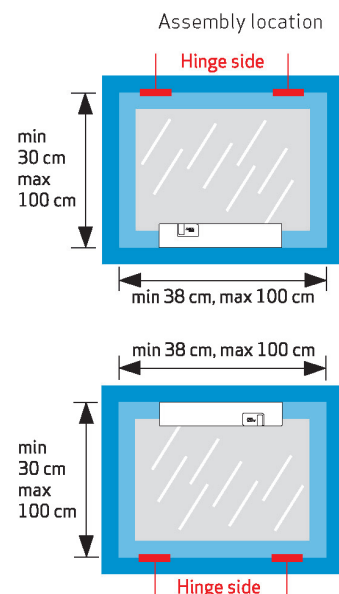

## ORDERING INFORMATION

Part No.	DESCRIPTION	COLOUR
F-AXA2.0 GY	FENTEC™ AXA Remote 2.0	GREY
F-AXA2.0 WH	FENTEC™ AXA Remote 2.0	WHITE

